

Washpermanent FR for polyester fabrics



Protech



Mobiltech



Homotech



Medtech

Protective clothing

EN ISO 14116: 1/25X40
EN ISO 15025

Automotive textiles

ISO 3795

Interior fabrics

EN ISO 6940; EN ISO 12952 – 1, 2

Eco-friendly products: formaldehyde- and Br- free

Suitable for high-vis dyed textiles (EN ISO 20471)

Low fogging (DIN 75201-G)

Compatible with OBA

Antistatic effect



TEXAFLAM HT

Exhaustion one-bath application during HT dyeing of PES

- lose material
- yarns
- woven / knitted fabrics

FR finishing of PES yarns: processable to 2D textiles and 3D knits

- antidecubitus textile products for health care sector and home care for elderly people life quality improvement
- cleanroom textiles

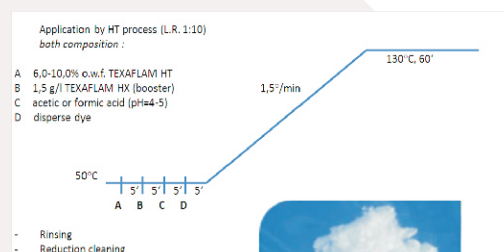

TEXAFLAM PE Conc.

Thermosol application

(fixing frame)

- compatible with photocatalytic finishing for pollutants decomposition (curtains)
- determined for white fabrics and sublimation-stable dyeings



Ecofriendly barrier textiles for safety & comfort

innovation from the source ...



inoTEX®

CZ 544 01 Dvůr Králové n.L.
Czech Republic

phone: + 420 499 320 140
fax: + 420 499 320 149

e-mail: info@inotex.cz
www: www.inotex.cz